

Boss-Lock™ Type H Dust Caps

Features:

- All Boss-Lock™ couplers are supplied with safety clips.
- Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on pages 65-67.




Size	356T6 Aluminum Part #	Brass Part #	Plated Malleable Iron Part #	316 Stainless Steel Part #
¾"	---	---	---	RH075BL
1"	AH100	BH100	---	RH100BL
1¼"	AH125	BH125	---	RH125BL
1½"	AH150	BH150	IH150	RH150BL
2"	AH200	BH200	IH200	RH200BL
2½"	AH250	BH250	---	---
3"	AH300	BH300	IH300	RH300BL
4"	AH400	BH400	IH400	RH400BL
6"	AH600	BH600	IH600	---
8"	AH800 ¹	---	---	---



¹ Dixon® and Boss-Lock™ cam and groove couplings *do not interchange in the 8" and ½" sizes.*

The 8" Boss-Lock™ design has 2 cam arms.

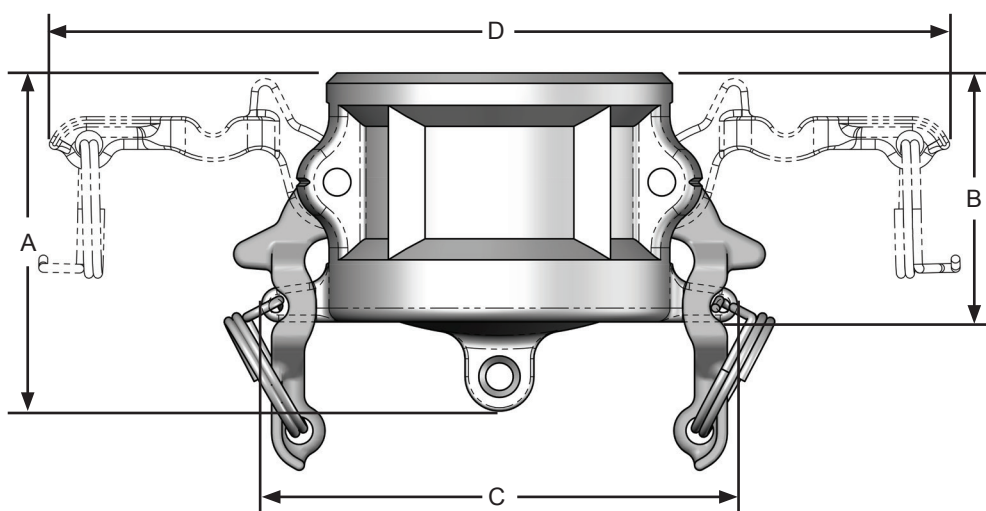

356T6 aluminum, brass and iron dimensions

Size	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8"
A overall length	---	2-3/16	2¾	2-15/16	3-1/16	3-7/32	3⅜	3-11/32	---	3-29/32	4-9/16
B coupler length	---	1-17/32	1-29/32	1-29/32	2-3/16	2¼	2-5/16	2-5/16	---	2⅝	2-13/16
C distance across safety lugs	---	2-29/32	3⅝	3-29/32	4-5/16	4-13/16	5-9/16	6-11/16	---	9⅞	11⅞
D distance across open cam arms	---	5-9/16	7-15/32	7-25/32	8-5/32	8-21/32	9-29/32	11	---	16-5/32	18-5/32

316 stainless steel dimensions

Size	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8"
A overall length	1-15/16	2¼	2¾	2-13/16	3-1/16	---	3⅜	3-19/32	---	---	---
B coupler length	1-9/32	1-9/16	1-29/32	1-29/32	2¼	---	2-9/32	2-5/16	---	---	---
C distance across safety lugs	2-25/32	2-29/32	3⅝	3-29/32	4-5/16	---	5-9/16	6-11/16	---	---	---
D distance across open cam arms	5-13/32	5-9/16	7-15/32	7-25/32	8-5/32	---	9-29/32	11	---	---	---