

Dixon® Type A Adapters

male adapter x female NPT

Feature:

- Pressure rating is based on the seal of the mating part. See ratings on page 6.



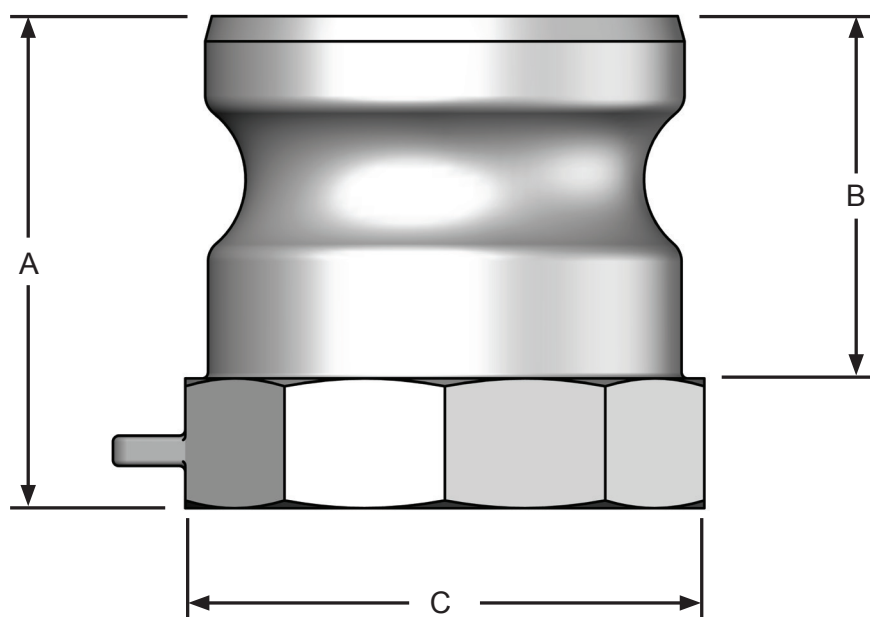
Size	356T6 Aluminum Part #	Aluminum Hard Coat Part #	Brass Part #	Unplated Mall. Iron Part #	Plated Mall. Iron Part #	316 Stain. Steel Part #
½"	50-A-AL ²	---	50-A-BR	---	---	50-A-SS
¾" x ½"	7550-A-AL ²	---	7550-A-BR	---	---	7550-A-SS
¾"	75-A-AL ²	---	75-A-BR	---	75-A-PM	75-A-SS
1"	100-A-AL ²	---	100-A-BR	---	100-A-PM	100-A-SS
1¼"	125-A-AL	---	125-A-BR	---	---	125-A-SS
1½"	150-A-AL	150-A-ALH	150-A-BR	150-A-MI	150-A-PM	150-A-SS
2"	200-A-AL	200-A-ALH	200-A-BR	200-A-MI	200-A-PM	200-A-SS
2½"	250-A-AL	---	250-A-BR	---	---	250-A-SS
3"	300-A-AL	300-A-ALH	300-A-BR	300-A-MI	300-A-PM	300-A-SS
4"	400-A-AL	400-A-ALH	400-A-BR	400-A-MI	400-A-PM	400-A-SS
5"	500-A-AL	---	500-A-BR	500-A-MI	---	500-A-SS
6"	600-A-AL	600-A-ALH	600-A-BR	---	600-A-PM ³	600-A-SS
8" DIX	800-A-AL ¹	---	---	---	---	---
8" BL	801-A-AL ¹	---	---	---	---	---



¹ Dixon and Boss-Lock cam and groove couplings do not interchange in the 8" and ½" sizes.

² made from 6061-T6 aluminum

³ ductile iron

**356T6 aluminum, brass and iron dimensions**

Size	½"	¾" x ½"	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8" DIX	8" BL
A overall length	1-11/16	1-21/32	1⅝	1-31/32	2-7/32	2-3/16	2⅞	2-11/16	2¼	3⅝	3-17/32	3-7/16	4-13/16	4-7/16
B adapter length	1-1/16	1-1/16	1-1/16	1⅞	1-9/16	1⅝	1⅞	1-15/16	2	2-1/16	2-5/16	2¼	3-9/16	2¼
C distance across flats	1	1⅜	1⅝	1½	2	2-9/32	2¼	3-7/32	3⅝	5	5-15/16	7-11/16	10⅝	10⅝

316 stainless steel dimensions

Size	½"	¾" x ½"	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8" DIX	8" BL
A overall length	1-11/16	1-17/32	1½	1-31/32	2⅞	2-3/16	2-19/32	3-11/32	2-29/32	3-5/32	3¼	3¼	---	---
B adapter length	1-1/16	1-1/16	1	1-5/16	1-9/16	1⅝	1⅞	1-15/16	2	2-1/16	2-5/16	2¼	---	---
C distance across flats	1	1-5/16	1-5/16	1½	1-15/16	2-9/32	2-11/16	3⅝	3¼	5	6-17/32	7¾	---	---