

Dixon® Type E Adapters

male adapter x hose barb

Feature:

- Pressure rating is based on the seal of the mating part. See ratings on page 6.




Size	356T6 Aluminum Part #	Aluminum Hard Coat Part #	Brass Part #	Unplated Mall. Iron Part #	Plated Mall. Iron Part #	316 Stain. Steel Part #
½"	50-E-AL	---	50-E-BR	---	---	50-E-SS
¾" x ½"	7550-E-AL	---	---	---	---	7550-E-SS
¾"	75-E-AL	---	75-E-BR	---	75-E-PM	75-E-SS
1"	100-E-AL	---	100-E-BR	---	100-E-PM	100-E-SS
1¼"	125-E-AL	---	125-E-BR	---	125-E-PM	125-E-SS
1½"	150-E-AL	150-E-ALH	150-E-BR	150-E-MI	150-E-PM	150-E-SS
2"	200-E-AL	200-E-ALH	200-E-BR	200-E-MI ²	200-E-PM	200-E-SS
2½"	250-E-AL	---	250-E-BR	---	---	250-E-SS
3"	300-E-AL	300-E-ALH	300-E-BR	300-E-MI ^{2,3}	300-E-PM ²	300-E-SS
4"	400-E-AL	400-E-ALH	400-E-BR	400-E-MI ^{2,3}	400-E-PM ^{2,3}	400-E-SS
5"	500-E-AL	---	---	---	---	500-E-SS
6"	600-E-AL	600-E-ALH	600-E-BR	600-E-MI ^{2,3}	600-E-PM ²	600-E-SS
8" DIX	800-E-AL ¹	---	---	---	---	---
8" BL	801-E-AL ¹	---	---	---	---	---



¹ Dixon® and Boss-Lock™ cam & groove couplings do not interchange in the 8" and ½ sizes

² suitable for King Crimp™ sleeves and ferrules

³ ductile iron

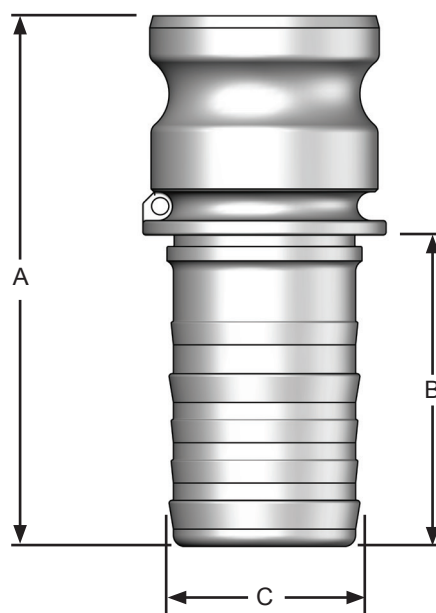

356T6 aluminum, brass and iron dimensions

Size	½"	¾" x ½"	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8" DIX	8" BL
A overall length	2½	2¾	3-15/16	4⅝	4⅞	5-1/16	6-1/32	6¼	6-25/32	7-3/16	7-5/32	9-5/32	11-13/16	11-7/16
B hose shank length	1-7/16	1-5/16	2⅝	2-15/16	2-13/16	2-29/32	3⅝	3¾	4-7/32	4¼	4¼	6-1/32	8	8
C hose shank OD	9/16	19/32	27/32	1-1/16	1-11/32	1-9/16	2-1/16	2-19/32	3-3/32	4-3/32	5-3/32	6-1/16	8-1/16	8-3/32

316 stainless steel dimensions

Size	½"	¾" x ½"	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8" DIX	8" BL
A overall length	2-7/16	2-25/32	3-13/32	4-11/16	4⅞	4-31/32	5¾	6¼	6⅞	7-3/32	7-5/32	9-7/16	---	---
B hose shank length	1-7/16	1-5/16	2⅝	2-15/16	2⅞	2-29/32	3⅝	3¾	4-3/16	4¼	4¼	6-3/32	---	---
C hose shank OD	9/16	19/32	27/32	1-1/16	1-11/32	1-9/16	2-1/16	2⅝	3-3/32	4-3/32	5-3/32	6-1/16	---	---