


EZ Boss-Lock™ Type H Dust Caps


Feature:

- Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on pages 65-67.

Size	356T6 Aluminum Part #	Brass Part #	316 Stainless Steel Part #
¾"	---	---	RH075EZ
1"	AH100EZ	BH100EZ	RH100EZ
1¼"	---	---	RH125EZ
1½"	AH150EZ	BH150EZ	RH150EZ
2"	AH200EZ	BH200EZ	RH200EZ
2½"	AH250EZ	---	---
3"	AH300EZ	BH300EZ	RH300EZ
4"	AH400EZ	---	RH400EZ
6"	AH600EZ	---	RH600EZ



- Under no circumstances should the EZ Boss-Lock™ cam arms be used on any fitting not specifically designed for their use. See page 6 for further specifications.
- Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

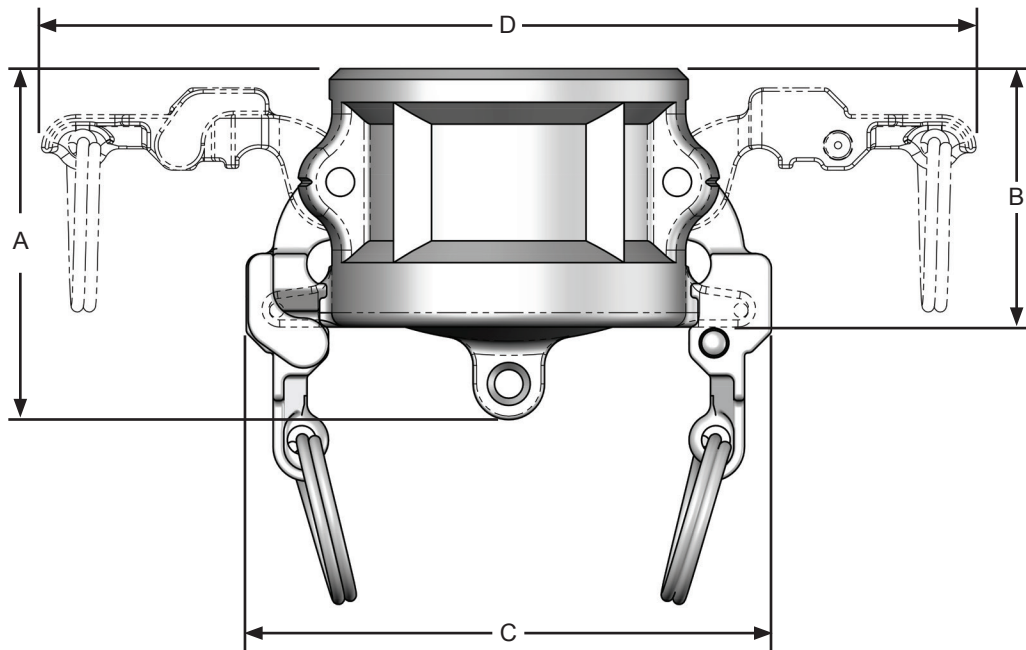

356T6 aluminum, brass and iron dimensions

Size	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8"
A overall length	---	2-3/16	---	2-15/16	3-1/16	3-7/32	3⅝	3-11/32	---	3-29/32	---
B coupler length	---	1-17/32	---	1-29/32	2-3/16	2¼	2-5/16	2-5/16	---	2⅝	---
C distance across closed cam arms	---	3-7/32	---	4-7/32	4-19/32	5-1/16	5-27/32	6-15/16	---	9-31/32	---
D distance across open cam arms	---	6-11/32	---	7-25/32	8-5/32	8-21/32	9-29/32	11	---	16-25/32	---

316 stainless steel dimensions

Size	¾"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8"
A overall length	1-15/16	2¼	2¼	2-13/16	3-1/16	---	3⅝	3-19/32	---	3¾	---
B coupler length	1-9/32	1-9/16	1-29/32	1-29/32	2¼	---	2-9/32	2-5/16	---	2-19/32	---
C distance across closed cam arms	3-3/32	3¼	3-29/32	4-7/32	4-19/32	---	5-27/32	6-15/16	---	9-31/32	---
D distance across open cam arms	6-7/32	6-11/32	7-15/32	7-25/32	8-5/32	---	9-29/32	11	---	16-25/32	---