

EZLink™ Armless Type D Couplers

Applications:

- transfer and/or unloading of fuels (gasoline or diesel) from tank truck to storage tanks
- transfer of water and solutions compatible with aluminum and Buna-N rubber

Materials:

- couplings and dust caps: A356 aluminum
- coupler tabs and springs: 316 stainless steel
- gasket: Buna-N

Features:

- automatic couplers push-to-connect providing a reliable connection
- low profile allows easy connection and disconnection in tight applications
- coupler push tabs can be locked with safety pins and/or zip tie
- compatible with standard cam and groove adapters


Specifications:

- maximum working pressure with King Crimp™ ferrules: **250 PSI** (2"), **150 PSI** (3" and 4")
- maximum working pressure with crimp sleeves: **110 PSI**
- maximum working pressure with band clamps: **100 PSI**
- gasket temperature range: **5°F to 180°F (-15°C to 82°C)**

Only use EZLink™ gaskets for this coupling system. Traditional cam & groove gaskets, or other types of seals are not compatible and will fail.



Size	A356 Aluminum Part #	316 Stainless Steel Part #
2"	EZL200-D-AL	EZL200-D-SS
3"	EZL300-D-AL	EZL300-D-SS
4"	EZL400-D-AL	---

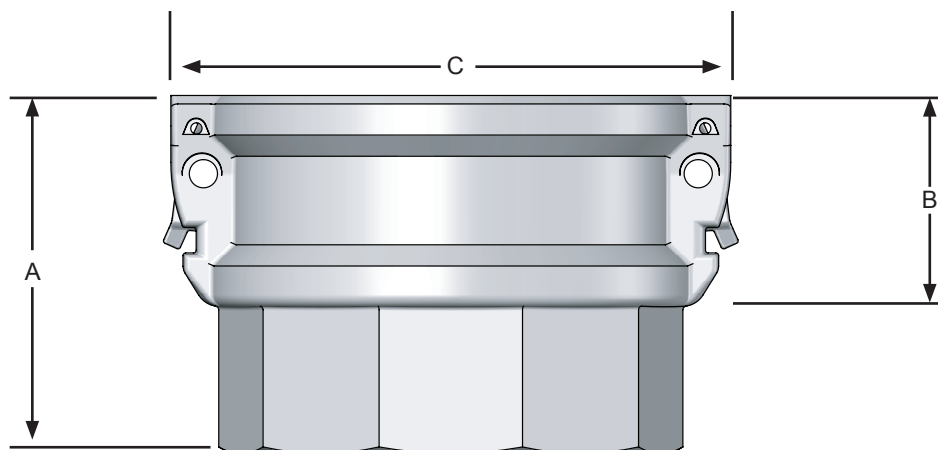

A356 aluminum dimensions

Size	2"	3"	4"
A overall length	3-5/16	3 3/8	3-31/32
B coupler length	2-3/16	2-5/16	2-5/16
C distance across EARS	3-21/32	5-3/32	6-3/16
D distance across flats	2 5/8	3 1/8	4 1/8

316 stainless steel dimensions

Size	2"
A overall length	3-3/16
B coupler length	2-3/16
C distance across EARS	3-21/32
D distance across flats	2 5/8