



Vent-Lock™ EZ Boss-Lock™ Type H Dust Caps

Features:

- safety release cam & groove couplings permit the release of static pressure when disconnecting hose assemblies
- venting system protects operator from being sprayed with hazardous or non-hazardous fluids or solids
- rated to **250 PSI**, recommendation based on the use of mating Dixon® L-style fittings at ambient temperature **70°F (21°C)** with standard Buna-N seal installed, for use at elevated temperature or other unusual operating conditions, consult Dixon®
 - 1", 1½" and 2" sizes have a maximum working pressure of **250 PSI**
 - 3" maximum working pressure **150 PSI** with King Crimp™ ferrules, crimp sleeves and bands at **125 PSI**
- does not interchange with standard cam & groove products use only with Vent-Lock™ L-style fittings

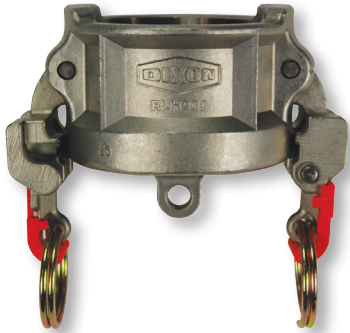

Size	316 Stainless Steel Part #
1"	RLH100EZ
1½"	RLH150EZ
2"	RLH200EZ
3"	RLH300EZ

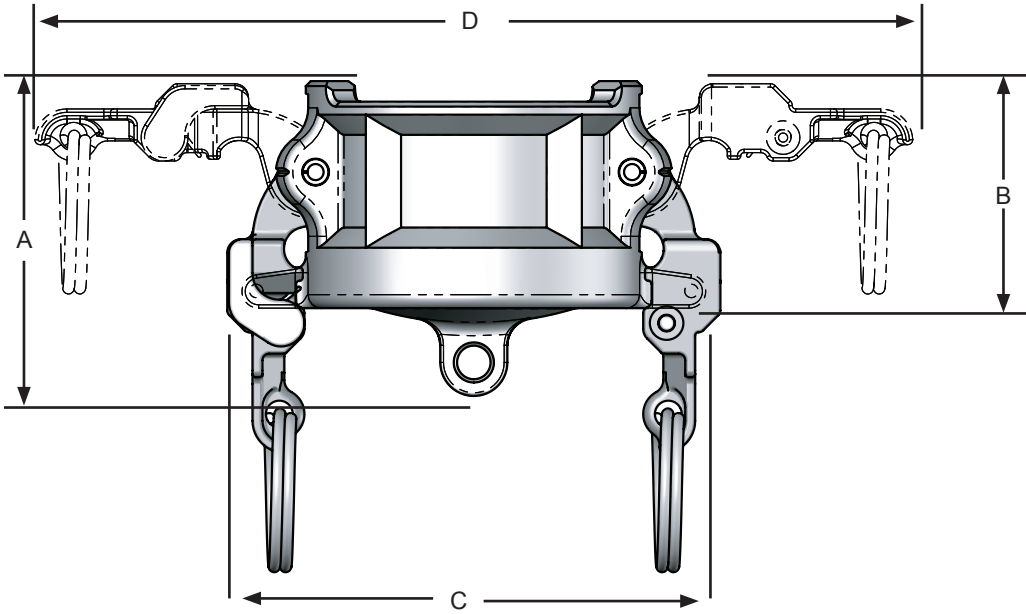

316 stainless steel dimensions

Size		1"	1½"	2"	3"
A	overall length	2-5/32	2-29/32	2-15/16	3⅞
B	coupler length	1-17/32	2-3/32	2⅞	2¼
C	distance across closed cam arms	3¼	4-7/32	4-19/32	5-27/32
D	distance across open cam arms	6-11/32	7-25/32	8-5/32	9-29/32