

Vent-Lock™ Safety EZ Boss-Lock™ Type C Couplers

female coupler x hose shank


Features:

- safety release cam & groove couplings permit the release of static pressure when disconnecting hose assemblies
- venting system protects operator from being sprayed with hazardous or non-hazardous fluids or solids
- rated to **250 PSI**, recommendation based on the use of mating Dixon® L-style fittings at ambient temperature **70°F (21°C)** with standard Buna-N seal installed, for use at elevated temperature or other unusual operating conditions, consult Dixon®
 - 1", 1½" and 2" sizes have a maximum working pressure of **250 PSI**
 - 3" maximum working pressure **150 PSI** with King Crimp™ ferrules, crimp sleeves and bands at **125 PSI**
- does not interchange with standard cam & groove products use only with Vent-Lock™  L-style fittings



Size	316 Stainless Steel Part #
1"	RLC100EZ
1½"	RLC150EZ
2"	RLC200EZ¹
3"	RLC300EZ¹

¹ has drop shank

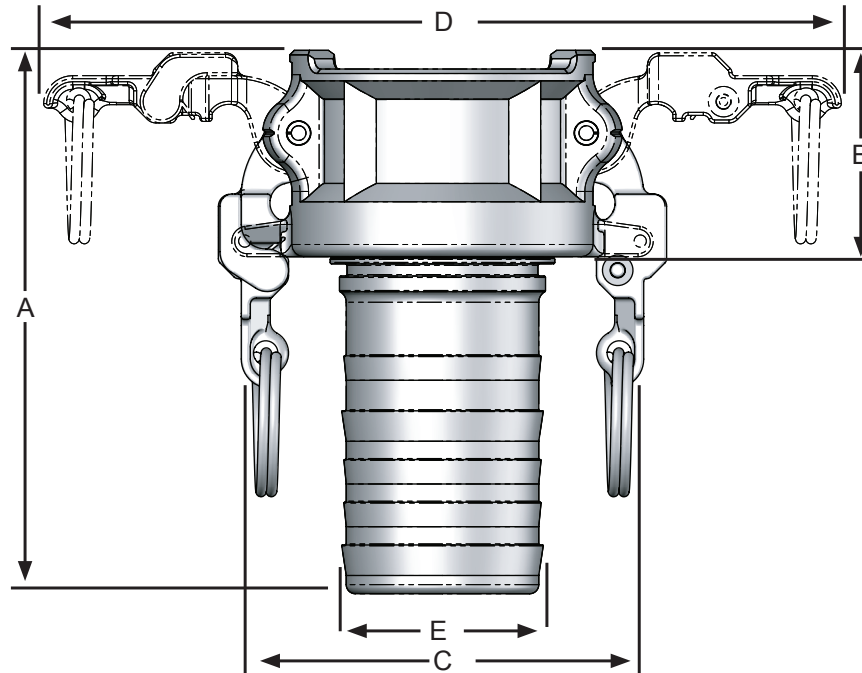

316 stainless steel dimensions

Size	1"	1½"	2"	3"
A overall length	4-15/32	5	5-9/16	6-9/16
B coupler length	1-17/32	2-3/32	2½	2¼
C distance across closed cam arms	3-7/32	4-7/32	4-19/32	5-27/32
D distance across open cam arms	6-11/32	7-25/32	8-5/32	9-29/32
E hose shank OD	1-1/16	1-9/16	2-1/16	3-3/32