



Vent-Lock™ Type DC Dust Caps

Features:

- safety release cam & groove couplings permit the release of static pressure when disconnecting hose assemblies
- venting system protects operator from being sprayed with hazardous or non-hazardous fluids or solids
- rated to **250 PSI**, recommendation based on the use of mating Dixon® L-style fittings at ambient temperature **70°F (21°C)** with standard Buna-N seal installed, for use at elevated temperature or other unusual operating conditions, consult Dixon®
 - 1", 1½" and 2" sizes have a maximum working pressure of **250 PSI**
 - 3" maximum working pressure **150 PSI** with King Crimp™ ferrules, crimp sleeves and bands at **125 PSI**
- does not interchange with standard cam & groove products use only with Vent-Lock™ 



Size	316 Stainless Steel Part #
1"	L100-DC-SS
1½"	L150-DC-SS
2"	L200-DC-SS

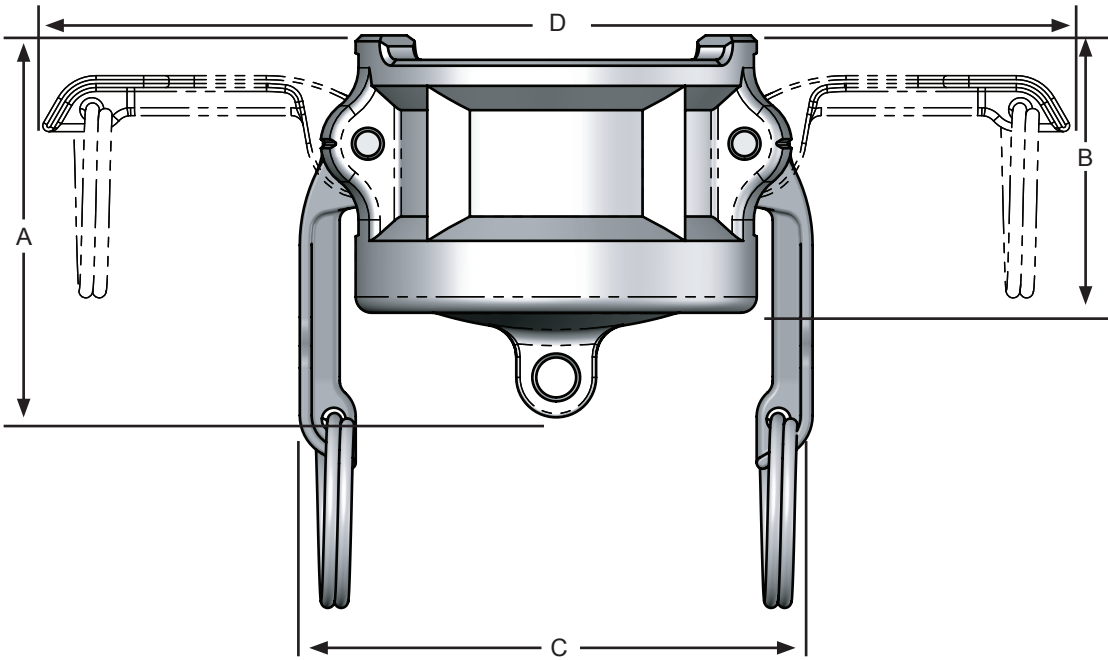

316 Stainless Steel

Size		2"	3"	4"
A	overall length	2-5/32	2¾	2-31/32
B	coupler length	1-19/32	1-29/32	2-5/32
C	distance across closed cam arms	2-7/16	3-9/16	3-15/16
D	distance across open cam arms	5-3/16	7-7/16	7-13/16